Gable Stud Reinforcement Detail for Stucco Cladding

ASCE 7-10: 200 mph Wind Speed, 15' Mean Height, Enclosed, Exposure C, Kzt = 1.00

Or: 180 mph Wind Speed, 15' Mean Height, Partially Enclosed, Exposure C, Kzt = 1.00
Or: 180 mph Wind Speed, 15' Mean Height, Enclosed, Exposure D, Kzt = 1.00
Or: 160 mph Wind Speed, 15' Mean Height, Partially Enclosed, Exposure D, Kzt = 1.00

Max Gable Vertical Length

2x4 Gable Vertical Spacing	Species	Brace Grade	No Braces	(1) 1x4 'L' Brace * Group A	(1) 1x4 'L' Brace * Group B	(1) 2x4 'L' Brace * Group A	(1) 2x4 'L' Brace * Group B	(2) 2x4 'L' Brace ** Group A	(2) 2x4 'L' Brace ** Group B	(1) 2x6 'L' Brace * Group A	(1) 2x6 'L' Brace * Group B	(2) 2x6 'L' Brace ** Group A	(2) 2x6 'L' Brace ** Group B
24" o.c.	SPF HF	#1 / #2	2' 10"	4' 10"	5' 0"	5' 9"	5' 11"	6' 10"	7' 1"	9' 0"	9' 4"	10' 8"	11' 1"
		#3	2' 8"	4' 6"	4' 9"	5' 8"	5' 10"	6' 9"	7' 0"	8' 10"	9' 3"	10' 7"	11' 0"
		Stud	2' 8"	4' 6"	4' 9"	5' 8"	5' 10"	6' 9"	7' 0"	8' 10"	9' 3"	10' 7"	11' 0"
		Standard	2' 8"	3' 10"	4' 1"	5' 2"	5' 6"	6' 9"	7' 0"	8' 1"	8' 8"	10' 7"	11' 0"
	SP DFL	#1	3' 0"	4' 11"	5' 1"	5' 10"	6' 0"	6' 11"	7' 2"	9' 1"	9' 5"	10' 10"	11' 3"
		#2	2' 10"	4' 10"	5' 0"	5' 9"	5' 11"	6' 10"	7' 1"	9' 0"	9' 4"	10' 8"	11' 1"
		#3	2' 9"	4' 1"	4' 4"	5' 5"	5' 9"	6' 9"	7' 1"	8' 6"	9' 1"	10' 7"	11' 1"
		Stud	2' 9"	4' 1"	4' 4"	5' 5"	5' 9"	6' 9"	7' 1"	8' 6"	9' 1"	10' 7"	11' 1"
		Standard	2' 8"	3' 7"	3' 10"	4' 9"	5' 1"	6' 6"	6' 11"	7' 6"	8' 0"	10' 2"	10' 11"
16" o.c.	SPF HF	#1 / #2	3' 3"	5' 7"	5' 9"	6' 7"	6' 10"	7' 10"	8' 1"	10' 3"	10' 8"	12' 3"	12' 9"
		#3	3' 1"	5' 6"	5' 9"	6' 6"	6' 9"	7' 9"	8' 0"	10' 2"	10' 7"	12' 1"	12' 7"
		Stud	3' 1"	5' 6"	5' 8"	6' 6"	6' 9"	7' 9"	8' 0"	10' 2"	10' 7"	12' 1"	12' 7"
		Standard	3' 1"	4' 9"	5' 0"	6' 4"	6' 9"	7' 9"	8' 0"	9' 10"	10' 7"	12' 1"	12' 7"
	SP DFL	#1	3' 5"	5' 8"	5' 10"	6' 8"	6' 11"	7' 11"	8' 2"	10' 5"	10' 10"	12' 4"	12' 10"
		#2	3' 3"	5' 7"	5' 9"	6' 7"	6' 10"	7' 10"	8' 1"	10' 3"	10' 8"	12' 3"	12' 9"
		#3	3' 2"	5' 0"	5' 3"	6' 6"	6' 9"	7' 9"	8' 1"	10' 3"	10' 7"	12' 2"	12' 8"
		Stud	3' 2"	5' 0"	5' 3"	6' 6"	6' 9"	7' 9"	8' 1"	10' 3"	10' 7"	12' 2"	12' 8"
		Standard	3' 1"	4' 5"	4' 8"	5' 10"	6' 3"	7' 9"	8' 0"	9' 2"	9' 10"	12' 1"	12' 7"
12" o.c.	SPF HF	#1 / #2	3' 7"	6' 1"	6' 4"	7' 3"	7' 6"	7' 10"	8' 11"	11' 4"	11' 9"	13' 6"	14' 0"
		#3	3' 5"	6' 0"	6' 3"	7' 1"	7' 5"	8' 6"	8' 10"	11' 2"	11' 7"	13' 4"	13' 10"
		Stud	3' 5"	6' 0"	6' 3"	7' 1"	7' 5"	8' 6"	8' 10"	11' 2"	11' 7"	13' 4"	13' 10"
		Standard	3' 5"	5' 5"	5' 10"	7' 1"	7' 5"	8' 6"	8' 10"	11' 2"	11' 7"	13' 4"	13' 10"
	SP DFL	#1	3' 9"	6' 2"	6' 5"	7' 4"	7' 7"	8' 8"	9' 0"	11' 5"	11' 11"	13' 7"	14' 0"
		#2	3' 7"	6' 1"	6' 4"	7' 3"	7' 6"	8' 7"	8' 11"	11' 4"	11' 9"	13' 6"	14' 0"
		#3	3' 6"	5' 9"	6' 1"	7' 2"	7' 5"	8' 6"	8' 11"	11' 3"	11' 8"	13' 5"	13' 11"
		Stud	3' 6"	5' 9"	6' 1"	7' 2"	7' 5"	8' 6"	8' 11"	11' 3"	11' 8"	13' 5"	13' 11"
		Standard	3' 5"	5' 1"	5' 5"	6' 9"	7' 3"	8' 6"	8' 10"	10' 7"	11' 4"	13' 4"	13' 10"

Bracing Group Species and Grades:

Group A:

Spruce-Pine-Fir	
#1 / #2	Standard
#3	Stud

Hem-Fir	
#2	Stud
#3	Standard

Douglas Fir-Larch
#3
Stud
Standard

Southern Pine***
#3
Stud
Standard

Group B:

Hem-Fir
#1 & Btr
#1

Douglas Fir-Larch
#1
#2

Southern Pine***
#1
#2

1x4 Braces shall be SRB (Stress-Rated Board).

***For 1x4 So. Pine use only Industrial 55 or Industrial 45 Stress-Rated Boards. Group B values may be used with these grades.

Gable Truss Detail Notes:

Wind Load deflection criterion is L/360.

Provide uplift connections for 130 plf over continuous bearing (5 psf TC Dead Load).

Gable end supports load from 4' 0" outlookers with 2' 0" overhang, or 12" plywood overhang.

Attach 'L' braces with 10d (0.128"x3.0" min) nails.

* For (1) 'L' brace: space nails at 2" o.c. in 18" end zones and 4" o.c. between zones.

** For (2) 'L' braces: space nails at 3" o.c. in 18" end zones and 6" o.c. between zones.

'L' bracing must be a minimum of 80% of web member length.

Diagonal brace option: vertical length may be doubled when diagonal brace is used. Connect diagonal brace for 840# at each end. Max web total length is 12'.

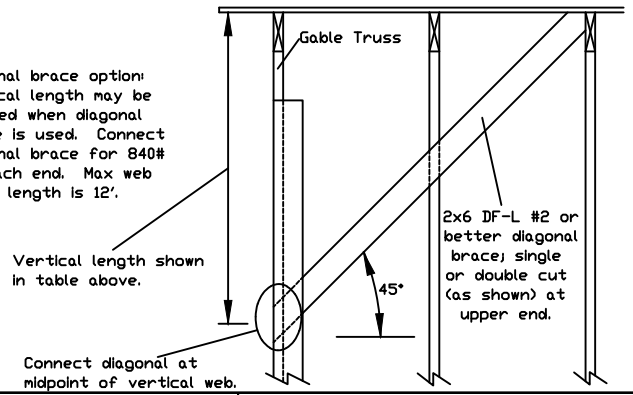

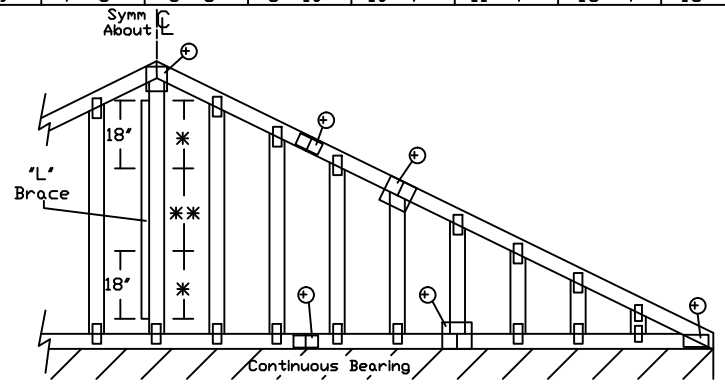

Refer to chart above for max gable vertical length.

Gable Vertical Plate Sizes

Vertical Length	No Splice
Less than 4' 0"	2X4
Greater than 4' 0", but less than 6' 0"	4X4

+ Refer to common truss design for peak, splice, and heel plates.

Refer to the Building Designer for conditions not addressed by this detail.

ALPINE® AN ITW COMPANY
514 Earth City Expressway
Suite 242
Earth City, MO 63045

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!
IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS.

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and SBCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraint of webs shall have bracing installed per BCSI sections B3, B7 or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions.

Alpine, a division of ITW Building Components Group Inc. shall not be responsible for any deviation from this drawing, any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation & bracing of trusses.

A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2.

For more information see this job's general notes page and these web sites:
ALPINE: www.alpineitw.com; TPI: www.tpinst.org; SBCA: www.sbcacomponents.com; ICC: www.iccsafe.org

MAX. TOT. LD. 60 PSF

MAX. SPACING 24.0"

REF ASCE7-10-GAB20015
DATE 8/3/15
DRWG S20015ENC100815